

GVD型：立式雙軸型齒輪減速機

TWO SHAFTS VERTICAL GEAR SPEED REDUCERS



HOW TO ORDER


GVD - 22 - 200 - 90

減速比: Gear Ratio 1:90

馬力<W>: 200 Watts 1/4HP

22: 出力軸22mm

GVD: 立式雙軸型 Two Shafts Vertical Type

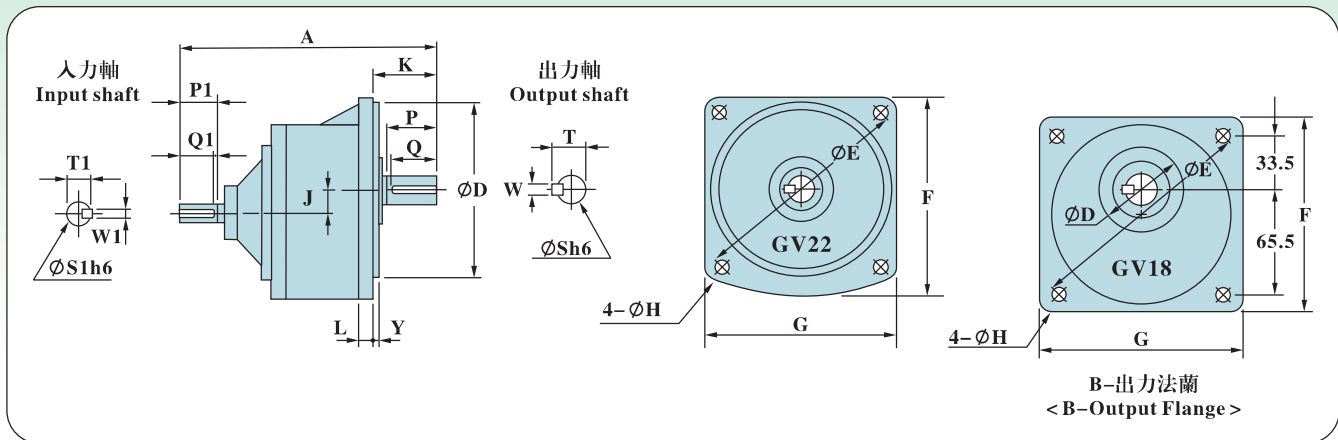

尺寸表(m/m)

馬力 HP-4P	減速比 Gear Ratio	A	D	E	F	G	H	L	J	K	Y	出力軸 Output shaft					入力軸 Input					重量 Kg
												P	Q	S	T	W	P1	Q1	S1	T1	W1	
100W (1/8HP)	3-50(B)	173	50	140	120	120	9	10	16	39	5	30	25	18	20	5	30	25	14	16	5	3
	60-200	207	148	185	170	156	11	12	18.2	47	3.5	40	35	22	25	7	30	25	14	16	5	4
200W (1/4HP)	3-10(B)	173	50	140	120	120	9	10	16	39	5	30	25	18	20	5	30	25	14	16	5	3
	15-90	207	148	185	170	156	11	12	18.2	47	3.5	40	35	22	25	7	30	25	14	16	5	5
	100-200	263	170	220	195	180	11	13	20.8	54	4	45	40	28	31	7	30	25	14	16	5	7
400W (1/2HP)	3-10	207	148	185	170	156	11	12	18.2	47	3.5	40	35	22	25	7	30	25	14	16	5	6
	15-90	263	170	220	195	180	11	13	20.8	54	4	45	40	28	31	7	30	25	14	16	5	7
	100-200	300	185	255	240	225	13	15	30.2	66	4	55	50	32	35.5	10	30	25	14	16	5	19
750W (1HP)	3-25	268	170	220	195	180	11	13	20.8	54	4	45	40	28	31	7	40	35	19	21.5	6	7
	30-120	310	185	255	240	225	13	15	30.2	66	4	55	50	32	35.5	10	40	35	19	21.5	6	21
	125-200	336	230	310	300	275	15	20	42.2	80	5	65	60	40	43.5	10	40	35	19	21.5	6	35
1500W (2HP)	3-25	320	185	255	240	225	13	15	30.2	66	4	55	50	32	35.5	10	50	40	24	27.5	8	21
	30-120	350	230	310	300	275	15	20	42.2	80	5	65	60	40	43.5	10	50	40	24	27.5	8	35
	125-180	400	280	390	360	320	19	20	51.4	89	5	80	75	50	54	14	50	40	24	27.5	8	55
2200W (3HP)	3-60	360	230	310	300	275	15	20	42.2	80	5	65	60	40	43.5	10	60	50	28	31	8	35
	70-120	400	280	390	360	320	19	20	51.4	89	5	80	75	50	54	14	60	50	28	31	8	55
3700W (5HP)	3-25	360	230	310	300	275	15	20	42.2	80	5	65	60	40	43.5	10	60	50	28	31	8	35
	30-80	400	280	390	360	320	19	20	51.4	89	5	80	75	50	54	14	60	50	28	31	8	55